



YE2、YE3、YD、YDT、YVF2、YEJ2系列电动机外形及安装尺寸

【机座带底脚、端盖上无凸缘的电动机】

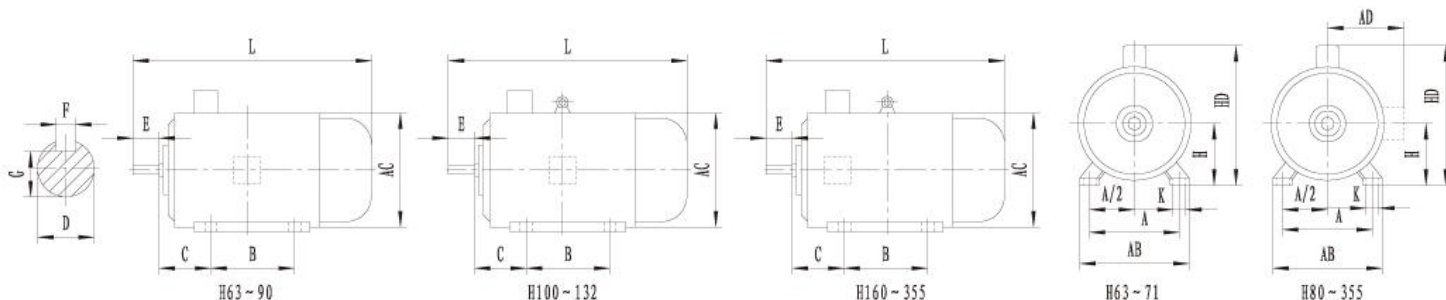

机座号 Frame size	极数 Poles	安装尺寸 Mounting dimensions										外形尺寸 Outline dimensions							
		A	A/2	B	C	D	E	F	G	H	K	AB	AC	AD	HD	L			
		YE2/YE3 YD/YDT	YVF2	YEJ2															
63M	2, 4	100	50	80	40	11	23	4	8.5	63	7	135	130	70	180	230	/	/	
71M	2, 4, 6	112	56	90	45	14	30	5	11	71		150	145	80	195	255	310	300	
80M	2, 4, 6, 8	125	62.5	100	50	19	40	6	15.5	80	10	165	175	145	220	305	350	360	
90S		140	70	100	56	24	50	8	20	90		180	195	155	250	360	380	390	
90L		125	100	125	56	24	50		20	90	10	180	195	155	250	390	410	415	
100L		160		80				140	63			28	60	24	100	205	215	180	270
112M		190	95	140	70	110	12	37	160	14.5	230	240	190	300	470	465	480		
132S		216	108	140	89			38	80		10	33	132	270	275	210	345	510	520
132M		254	127	178	108		42	12	37	160	14.5	270	275	210	345	560	560	595	
160M				210								108	42	12	37	160	14.5	700	670
160L		254	740	720	765														
180M		279	139.5	241	121		48	14	42.5	180	18.5	395	420	305	505	830	830	915	
180L	279	139.5	279	121	48		14	42.5	180	395		420	305	505	830	830	915		
200L	318	159	305	133	55		16	49	200	18.5	435	470	335	560	830	900	965		
225S	4, 8	356	178	286	149		55	110	16		49	225	435	470	335	560	825	895	960
225M	2	406	203	311	168		60	18	53	250	24	490	510	370	615	855	925	990	
250M	4, 6, 8			60		53										250	24	490	510
280S	2	457	228.5	368	190	65	140	20	67.5	280	550	580	410	680	985	1050			
280M	4, 6, 8			75											65	18	58	1035	1100
315S	2			68											18	58	1180	1235	
	4, 6, 8, 10			80											170	22	71	1290	1265
315M	2	508	254	457	216	65	140	18	58	315	635	645	490	800	1210	1345			
315L	4, 6, 8, 10			80		170	22	71	1320						1375				
	2			65		140	18	58	1210						1345				
315L	4, 6, 8, 10			80		170	22	71	1320						1375				
355M	2	610	305	560	254	75	140	20	67.5	355	730	710	555	910	1500	1570			
355L	4, 6, 8, 10			95		170	25	86	1530						1600				
	2			75		140	20	67.5	1500						1570				
355L	4, 6, 8, 10			95		170	25	86	1530						1600				
400M, L	4, 6, 8, 10	686	343	630 710	280	110	210	28	100	400	35	808	800	695	1095	1920	2160		

【机座带底脚、端盖上有凸缘（带通孔）的电动机】

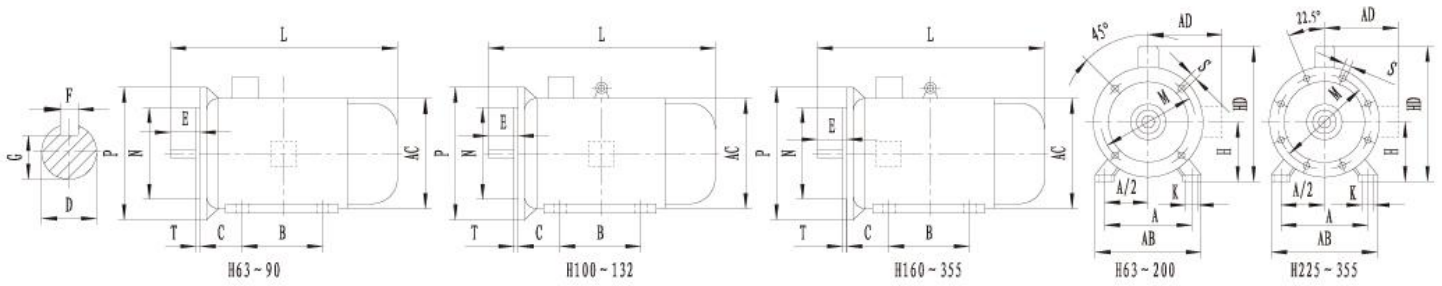

机座号 Frame size	凸缘号 Flange size	极数 Poles	安装尺寸 Mounting dimensions																外形尺寸 Outline dimensions									
			A	A/2	B	C	D	E	F	G	H	K	M	N	P	R	S	T	凸缘孔数 Flange holes	AB	AC	AD	HD	L				
			YE2/YE3 YD/YDT	YVF2	YEJ2																							
63M	FF115	2, 4	100	50	80	40	11	23	4	8.5	63	7	115	95	140			10	3		135	130	70	180	230	/	/	
71M	FF130	2, 4, 6	112	56	90	45	14	30	5	11	71		130	110	160						150	145	80	195	255	310	300	
80M			125	62.5	100	50	19	40	6	15.5	80									3.5	165	175	145	220	305	350	360	
90S	FF165		140	70	100	56	24	50		20	90	10	165	130	200				12		180	195	155	250	360	380	390	
90L					125							8													390	410	415	
100L	FF215		160	80	140	63	28	60			100		215	180	250						205	215	180	270	435	455	465	
112M			190	95	140	70					112	12									230	240	190	300	470	465	480	
132S	FF215	2, 4, 6, 8	216	108	140	89	38	80	10	33	132		265	230	300				14.5	4	270	275	210	345	510	520	555	
132M					178																				560	560	595	
160M			254	127	210	108	42				12	37	160								320	330	255	420	670	670	720	
160L	FF300				254																				700	720	765	
180M			279	139.5	241	121	48	110				14.5	300	250	350										740	735	825	
180L					279																				790	775	865	
200L	FF350		318	159	305	133	55				16	49	200		350	300	400				395	420	305	505	790	830	915	
225S		4, 8			286		60	140	18	53															830	900	965	
225M	FF400	2	356	178		149	55	110	16	49	225	18.5	400	350	450						435	470	335	560	825	895	960	
		4, 6, 8			311														0	18.5	5				855	925	990	
250M		2	406	203	349	168					18		250								490	510	370	615	915	995		
		4, 6, 8					65				58																	
280S	FF500	2			368			140				24	500	450	550										985	1050		
		4, 6, 8	457	228.5		190	75		20	67.5											550	580	410	680				
280M		2			419		65		18	58		280													1035	1100		
		4, 6, 8					75		20	67.5																		
315S		2			406		65		18	58															1180	1235		
		4, 6, 8, 10					80	170	22	71															1290	1265		
315M	FF600	2	508	254	457	216	65	140	18	58	315		600	550	660						635	645	490	800	1210	1345	/	
		4, 6, 8, 10					80	170	22	71															1320	1375		
315L		2			508		65	140	18	58		28													1210	1345		
		4, 6, 8, 10					80	170	22	71															1320	1375		
355M	FF740	2			560		75	140	20	67.5															1500	1570		
		4, 6, 8, 10	610	305		254	95	170	25	86	355		740	680	800						730	710	555	910	1530	1600		
		2					75	140	20	67.5															1500	1570		
355L		4, 6, 8, 10			630		95	170	25	86															1530	1600		

